


BSP

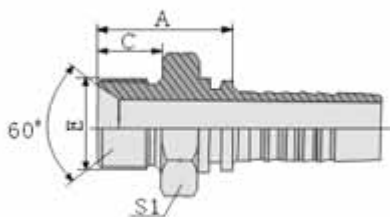

12611A-BSP Male Double Use For 60° Cone Seat or Bonded Seal

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

Part Number	Screw Thread E	Hose Bore		Dimensions		
		DN	Dash	A	C	S1
12611A-02-03	G1/8 " x28	5	03	22	10	14
12611A-04-04	G1/4 " x19	6	04	24.5	12	19
12611A-04-05	G1/4 " x19	8	05	24.5	12	19
12611A-06-05	G3/8 " x19	8	05	26	13.5	22
12611A-06-06	G3/8 " x19	10	06	28	13.5	22
12611A-06-08	G3/8 " x19	12	08	28.5	13.5	22
12611A-08-06	G1/2 " x14	10	06	33	16	27
12611A-08-08	G1/2 " x14	12	08	33.5	16	27
12611A-08-10	G1/2 " x14	16	10	32	16	27
12611A-10-08	G5/8 " x14	12	08	35	17.5	30
12611A-10-10	G5/8 " x14	16	10	36	17.5	30
12611A-12-08	G3/4 " x14	12	08	36.5	18.5	32
12611A-12-10	G3/4 " x14	16	10	37.5	18.5	32
12611A-12-12	G3/4 " x14	20	12	37.5	18.5	32
12611A-16-12	G1 " x11	20	12	42.5	20.5	41
12611A-16-18	G1 " x11	25	16	43.5	20.5	41

12611A-20-16	G1.1/4 " x11	25	16	45.5	20.5	50
12611A-20-20	G1.1/4 " x11	32	20	46.5	20.5	50
12611A-24-24	G1/2 " x11	40	24	49	23	55
12611A-32-32	G2 " x11	50	32	54.5	25.5	70