


## O-ring

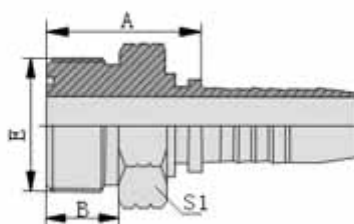

### 14211-ORFS Male O-Ring Seat ISO8434-3—SAEJ1453

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

#### Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		O RING	DIMENSIONS		
		DN	DASH		A	C	S1
14211-04-04	9/16°x18	6	04	0011	22 . 3	9 . 8	17
14211-06-04	11/16°x16	6	04	0012	24	11 . 2	19
14211-06-06	11/16°x16	10	06	0012	24	11 . 2	19
14211-08-06	13/16°x16	10	06	0014	27 . 5	12 . 8	22
14211-08-08	13/16°x16	12	08	0014	28 . 5	12 . 8	22
14211-08-10	13/16°x16	16	10	0014	28 . 5	12 . 8	22
14211-10-08	1°x14	12	08	0016	32 . 5	15 . 5	27
14211-10-10	1°x14	16	10	0016	34	15 . 5	27
14211-12-08	1 . 3/16°x12	12	08	0018	35 . 5	17	32
14211-12-10	1 . 3/16°x12	16	10	0018	36 . 5	17	32
14211-12-12	1 . 3/16°x12	20	12	0018	36 . 5	17	32
14211-16-12	1 . 7/16°x12	20	12	0021	37	17 . 5	38
14211-16-16	1 . 7/16°x12	25	16	0021	38 . 5	17 . 5	38
14211-20-20	1 . 11/16°x12	32	20	0025	41 . 5	17 . 5	46
14211-24-24	2°x12	40	24	0029	43 . 5	17 . 5	55

Note:1. For use with braided hoses 2 . If use with spiral hoses, hose fitting series number is 14212x-xx.