


15611-NPT Male

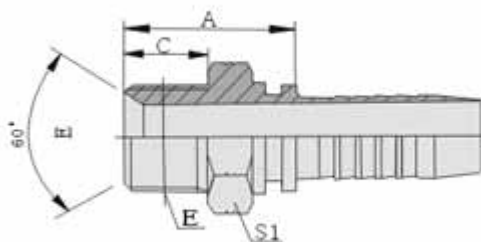

15611-NPT Male

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS		
		DN	DASH	A	C	S1
15611-02-03	Z1/8°x27	5	03	22 . 5	10 . 5	12
15611-02-04	Z1/8°x27	6	04	22 . 5	10 . 5	12
15611-04-03	Z1/4°x18	5	03	27 . 5	15	17
15611-04-04	Z1/4°x18	6	04	28	15	17
15611-04-05	Z1/4°x18	8	05	28	15	17
15611-04-06	Z1/4°x18	10	06	27	15	17
15611-06-04	Z3/8°x18	6	04	28	16	19
15611-06-05	Z3/8°x18	8	05	28	16	19
15611-06-06	Z3/8°x18	10	06	30	16	19
15611-06-08	Z3/8°x18	12	08	30 . 5	16	19
15611-08-06	Z1/2°x14	10	06	34 . 5	19 . 5	22
15611-08-08	Z1/2°x14	12	08	34 . 5	19 . 5	22
15611-08-10	Z1/2°x14	16	10	36	19 . 5	22
15611-12-08	Z3/4°x14	12	08	37 . 5	19 . 5	27
15611-12-10	Z3/4°x14	16	10	38	19 . 5	27
15611-12-12	Z3/4°x14	20	12	38 . 5	19 . 5	27

15611-12-16	Z3/4°x14	25	16	39 . 5	19 . 5	32
15611-16-10	Z1°x11 . 5	16	10	45	25 . 5	36
15611-16-12	Z1°x11 . 5	20	12	45	25 . 5	36
15611-16-16	Z1°x11 . 5	25	16	44 . 5	25 . 5	36
15611-20-16	Z1 . 1/4°x11 . 5	25	16	49 . 5	26 . 5	46
15611-20-20	Z1 . 1/4°x11 . 5	32	20	49	26 . 5	46
15611-24-24	Z1 . 1/2°x11 . 5	40	24	51	27 . 5	50
15611-32-32	Z2°x11 . 5	50	32	55	27 . 5	65

Note: 1. For use with braided hoses 2 . If use with spiral hoses, hose fitting series number is 15612x-xx.