


O-ring

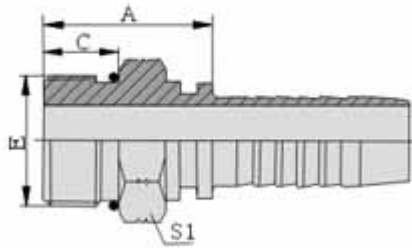

16011-SAE O-Ring Male ISO11926-SAEJ1926

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		O RING	DIMENSIONS		
		DN	DASH		A	C	S1
16011-04-04	7/16°x20	6	04	0904	21 . 5	9 . 1	14
16011-05-04	1/2°x20	6	04	0905	21 . 5	9 . 1	17
16011-06-05	9/16°x18	8	05	0906	22 . 5	9 . 9	17
16011-06-06	9/16°x18	10	06	0906	22 . 5	9 . 9	17
16011-08-06	3/4°x16	10	06	0908	24 . 5	11 . 1	22
16011-08-08	3/4°x16	12	08	0908	25	11 . 1	22
16011-10-08	7/8°x14	12	08	0910	29 . 5	12 . 7	27
16011-10-10	7/8°x14	16	10	0910	30 . 5	12 . 7	27
16011-12-10	1 . 1/16°x12	16	10	0912	34	15 . 1	32
16011-12-12	1 . 1/16°x12	20	12	0912	34	15 . 1	32
16011-16-16	1 . 5/16°x12	25	16	0916	36	15 . 1	38

Note:1. For use with braided hoses 2 . If use with spiral hoses, hose fitting series number is 16012x-xx.