


JIC

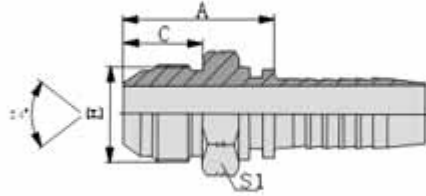

16711-JIC Male 74° Cone ISO8434-2—SAE J514

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS		
		DN	DASH	A	C	S2
16711-04-03	7/16°x20	5	03	26	14	12
16711-04-04	7/16°x20	6	04	26 . 5	114	12
16711-05-04	1/2°x20	6	04	26 . 5	14	14
16711-05-05	1/2°x20	8	05	26 . 5	14	14
16711-05-06	1/2°x20	10	05	26 . 5	14	17
16711-06-04	9/16°x18	6	04	26 . 5	14 . 1	17
16711-06-05	9/16°x18	8	05	26 . 5	14 . 1	17
16711-06-06	9/16°x18	10	06	26 . 5	14 . 1	17
16711-08-06	3/4°x16	10	06	31 . 5	16 . 7	22
16711-08-08	3/4°x16	12	08	32	16 . 7	22
16711-10-06	7/8°x14	10	06	32	19 . 3	24
16711-10-08	7/8°x14	12	08	34 . 3	19 . 3	24
16711-10-10	7/8°x14	16	10	35 . 5	19 . 3	24
16711-12-08	1 . 1/16°x12	12	08	39	21 . 9	27
16711-12-10	1 . 1/16°x12	16	10	40	21 . 9	27
16711-12-12	1 . 1/16°x12	20	12	40	21 . 9	27

16711-12-16	1 . 1/16°×12	25	16	41	21 . 9	30
16711-14-10	1 . 3/16°×12	16	1010	41 . 5	22 . 6	32
16711-14-12	1 . 3/16°×12	20	12	40 . 6	22 . 6	32
16711-16-12	1 . 5/16°×12	20	12	42 . 5	23 . 1	36
16711-16-16	1 . 5/16°×12	25	16	43 . 5	23 . 1	36
16711-20-16	1 . 5/8°×12	25	16	46 . 5	24 . 3	46
16711-20-20	1 . 5/8°×12	32	20	47 . 5	24 . 3	46
16711-24-20	1 . 7/8°×12	32	20	53	27 . 5	50
16711-24-24	1 . 7/8°×12	40	24	53	27 . 5	50
16711-32-32	2 . 1/2°×12	50	32	62	33 . 9	65
Note: 1. For use with braided hoses 2 . If use with spiral hoses, hose fitting series number is 16712x-xx.						