


# O-ring

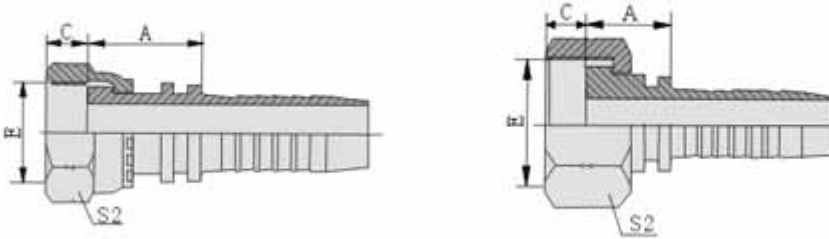

## [2/34211-ORFS Female Nut Flat Seat ISO-12151-1—SAEJ516](#)

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

### Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS		
		DN	DASH	A	C	S2
24211-04-04	9/16°x18	6	04	22 . 5	8 . 5	19
26711-04-05	9/16°x18	8	05	22 . 5	8 . 5	19
26711-04-06	9/16°x18	10	06	22 . 5	8 . 5	19
26711-06-04	11/16°x16	6	04	23 . 5	10	22
26711-06-05	11/16°x16	8	05	23 . 5	10	22
26711-06-06	11/16°x16	10	06	25 . 5	10	22
26711-06-08	11/16°x16	12	08	26	10	22
26711-08-05	13/16°x16	8	05	25	11	27
26711-08-06	13/16°x16	10	06	25	11	27
26711-08-08	13/16°x16	12	08	28	11	27
26711-08-10	13/16°x16	16	10	29	11	27
26711-10-08	1°x14	12	08	29 . 5	13 . 5	30
26711-10-10	1°x14	16	10	33 . 5	13 . 5	30
26711-10-12	1°x14	20	12	33 . 5	13 . 5	30
34211-12-08	1 . 3/16°x12	12	08	30 . 5	15	36
34211-12-10	1 . 3/16°x12	16	10	31 . 5	15	36

34211-12-12	1 . 3/16°x12	20	12	35	15	36
34211-16-12	1 . 7/16°x12	20	12	35	14 . 8	41
34211-16-16	1 . 7/16°x12	25	16	35	14 . 8	41
34211-16-20	1 . 7/16°x12	32	20	39 . 5	14 . 8	41
34211-20-16	1 . 7/16°x12	25	16	35	15	50
34211-20-20	1 . 11/16°x12	32	20	39 . 5	15	50
34211-24-24	2°x12	40	24	36	14 . 8	60
Note:1. For use with braided hoses 2 . If use with spiral hoses, hose fitting series number is 24212x-xx.						