


O-ring

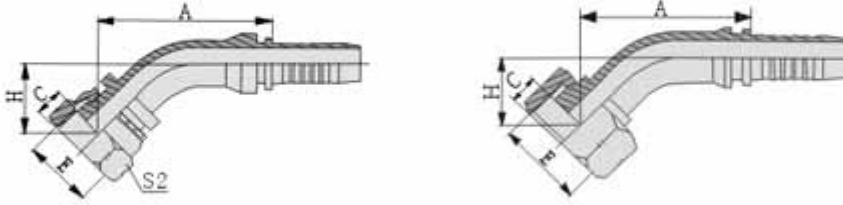

2/34241-45°ORFS Female Nut Flat Seat ISO-12151-1—SAEJ516

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS			
		DN	DASH	A	c	H	S2
24211-04-04	9/16°x18	6	04	45 . 5	23 . 4	8 . 5	19
26711-04-05	9/16°x18	8	05	47 . 6	24 . 3	8 . 5	19
26711-04-06	9/16°x18	10	06	49 . 2	24 . 9	8 . 5	19
26711-06-04	11/16°x16	6	04	39 . 5	17 . 4	10	22
26711-06-05	11/16°x16	8	05	42 . 3	19	10	22
26711-06-06	11/16°x16	10	06	51 . 7	27 . 4	10	22
26711-06-08	11/16°x16	12	08	63 . 9	29	10	22
26711-08-06	13/16°x16	10	06	44 . 6	20 . 3	11	27
26711-08-08	13/16°x16	12	08	65 . 3	30 . 4	11	27
26711-08-10	13/16°x16	16	10	76 . 5	31 . 7	11	27
26711-10-08	1°x14	12	08	58 . 2	23 . 3	13 . 5	30
26711-10-10	1°x14	16	10	79 . 7	34 . 9	13 . 5	30
26711-10-12	1°x14	20	12	86 . 5	38 . 4	13 . 5	30
34211-12-08	1 . 3/16°x12	12	08	58 . 2	23 . 3	15	36
34211-12-10	1 . 3/16°x12	16	10	69 . 4	24 . 6	15	36
34211-12-12	1 . 3/16°x12	20	12	87 . 6	39 . 5	15	36

34211-16-12	1 . 7/16°x12	20	12	74	29 . 6	14 . 8	41
24211-16-14	1 . 7/16°x12	22	14	78 . 7	28 . 5	14 . 8	41
34211-16-16	1 . 7/16°x12	25	16	84 . 1	29 . 7	14 . 8	41
34211-20-16	1 . 11/16°x12	25	16	80 . 9	32 . 7	15	50
34211-20-20	1 . 11/16°x12	32	20	111 . 2	49	15	50
34211-24-24	2°x12	40	24	108 . 5	37 . 7	14 . 8	60

Note:1. For use with braided hoses 2 . If use with spiral hoses. hose fitting series number is 24242x-xx.