


# O-ring

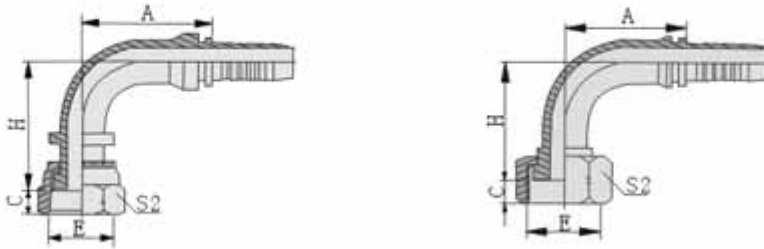

## [2/34291-90°ORFS Female Nut Flat Seat ISO-12151-1—SAEJ516](#)

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

### Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS			
		DN	DASH	A	C	H	S2
24211-04-04	9/16°x18	6	04	45 . 5	41	8 . 5	19
26711-04-05	9/16°x18	8	05	47 . 6	44	8 . 5	19
26711-04-06	9/16°x18	10	06	49 . 2	46 . 3	8 . 5	19
26711-06-05	11/16°x16	8	05	42 . 3	37 . 5	10	22
26711-06-06	11/16°x16	10	06	51 . 7	49 . 8	10	22
26711-06-08	11/16°x16	12	08	63 . 9	55	10	22
26711-08-06	13/16°x16	10	06	44 . 6	39 . 8	11	27
26711-08-08	13/16°x16	12	08	65 . 3	57	11	27
26711-08-10	13/16°x16	16	10	76 . 5	61 . 5	11	27
26711-10-08	1°x14	12	08	58 . 2	46	13 . 5	30
26711-10-10	1°x14	16	10	79 . 7	66	13 . 5	30
26711-10-12	1°x14	20	12	86 . 5	75 . 5	13 . 5	30
34211-12-10	1 . 3/16°x12	16	10	69 . 4	51 . 5	15	36
34211-12-12	1 . 3/16°x12	20	12	87 . 6	77	15	36
34211-16-12	1 . 7/16°x12	20	12	74	63	14 . 8	41
24211-16-14	1 . 7/16°x12	22	14	78 . 7	63	14 . 8	41

34211-16-16	1 . 7/16°x12	25	16	84 . 1	67 . 5	14 . 8	41
34211-20-16	1 . 11/16°x12	25	16	80 . 9	67 . 5	15	50
34211-20-20	1 . 11/16°x12	32	20	111 . 2	100	15	50
34211-24-24	2°x12	40	24	108 . 5	92	14 . 8	60

Note: 1. For use with braided hoses 2 . If use with spiral hoses, hose fitting series number is 24292x-xx.