


JIC

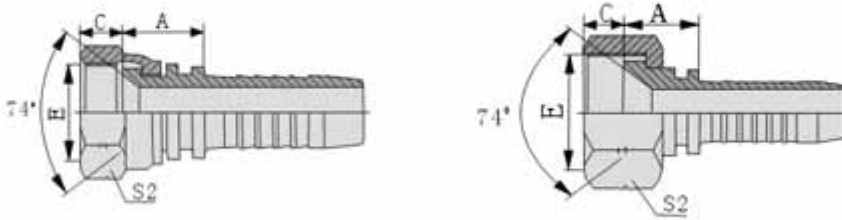

[2/36711-JIC Female Nut 74° Cone Seat SAE J514](#)

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS		
		DN	DASH	A	C	S2
26711-04-03	7/16°x20	5	03	14 . 5	9	15
26711-04-04	7/16°x20	6	04	15	9	15
26711-05-04	1/2°x20	6	04	15 . 5	9 . 5	17
26711-05-05	1/2°x20	8	05	15 . 5	9 . 5	17
26711-05-06	1/2°x20	10	05	15 . 5	9 . 5	17
26711-06-04	9/16°x18	6	04	15 . 5	10 . 5	19
26711-06-05	9/16°x18	8	05	15 . 5	10 . 5	19
26711-06-06	9/16°x18	10	06	15 . 5	10 . 5	19
26711-06-08	9/16°x18	12	08	16	10 . 5	19
26711-08-06	3/4°x16	10	06	17 . 5	11	24
26711-08-08	3/4°x16	12	08	18	11	24
26711-08-10	3/4°x16	16	10	19 . 5	11	24
26711-10-08	7/8°x14	12	08	18 . 5	13	27
26711-10-10	7/8°x14	16	10	20	13	27
26711-10-12	7/8°x14	20	12	20	13	27
26711-12-10	1 . 1/16°x12	16	10	21 . 5	15	32

26711-12-12	1 . 1/16°x12	20	12	21 . 5	15	32
26711-12-16	1 . 1/16°x12	25	16	23	15	32
26711-14-12	1 . 3/16°x12	20	12	21 . 5	15	36
26711-16-12	1 . 5/16°x12	20	12	18 . 5	16	41
26711-16-16	1 . 5/16°x12	25	16	23	16	41
26711-16-20	1 . 5/16°x12	32	20	24	16	41
26711-20-16	1 . 5/8°x12	25	16	23	17	50
26711-20-20	1 . 5/8°x12	32	20	26	17	50
26711-24-20	1 . 7/8°x12	32	20	26 . 5	20	55
26711-24-24	1 . 7/8°x12	40	24	26 . 5	20	55
26711-32-24	2 . 1/2°x12	40	24	27	23 . 5	75
26711-32-32	2 . 1/2°x12	50	32	27	23 . 5	75

Note: 1. For use with braided hoses 2 . If use with spiral hoses, hose fitting series number is 26712x-xx.