


21611-NPSM Female Swivel 60°Con

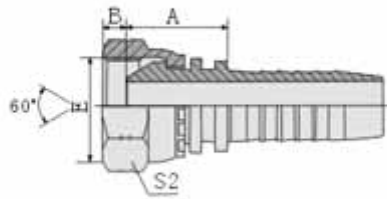

21611-NPSM Female Swivel 60°Cone With Swivel Nut SAE J514

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS		
		DN	DASH	A	C	S2
15611-04-04	1/4°x18	6	04	22	4 . 6	19
15611-04-06	1/4°x18	10	06	22	4 . 6	19
15611-06-04	3/8°x18	6	04	23	6	22
15611-06-05	3/8°x18	8	05	23	6	22
15611-06-06	3/8°x18	10	06	23	6	22
15611-08-08	1/2°x14	12	08	23 . 5	7 . 5	27
15611-12-10	3/4°x14	16	10	27	8 . 9	32
15611-12-12	3/4°x14	20	12	27	8 . 9	32
15611-16-12T	1°x11 . 5	20	12	25	10 . 5	41
15611-16-16	1°x11 . 5	25	16	28 . 5	10 . 5	41
15611-20-20	1 . 1/4°x11 . 5	32	20	29 . 5	11 . 2	50
15611-24-20	1 . 1/2°x11 . 5	32	20	29 . 5	11 . 2	55
15611-24-24	1 . 1/2°x11 . 5	40	24	31 . 5	11 . 2	55
15611-32-32	2°x11 . 5	50	32	31	11 . 2	70

Note: 1. For use with braided hoses 2 . If use with spiral hoses. hose fitting series number is 21612x-xx.