


# Female Swivel 60° Cone With Swivel Nut

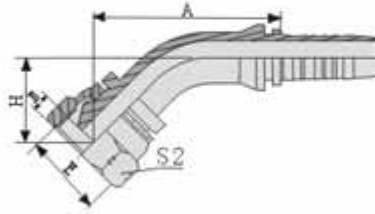

## 21641-45°NPSM Female Swivel 60°Cone With Swivel Nut SAE J514

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

### Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS			
		DN	DASH	A	C	H	S2
15641-04-04	1/4°x18	6	04	45 . 1	4 . 6	23	19
15641-06-06	3/8°x18	10	06	47 . 2	6	24 . 9	22
15641-08-08	1/2°x14	12	08	62 . 7	7 . 5	27 . 7	27
15641-12-12	3/4°x14	20	12	81 . 4	8 . 9	34	32
15641-16-16	1°x11 . 5	25	16	89 . 2	10 . 5	35	41
15641-20-20	1 . 1/4°x11 . 5	32	20	99 . 8	11 . 2	39 . 3	50
15641-24-24	1 . 1/2°x11 . 5	40	24	115 . 1	11 . 2	44 . 4	55
15641-32-32	2°x11 . 5	50	32	136 . 4	11 . 2	63 . 4	70

Note:1. For use with braided hoses 2 . If use with spiral hoses. hose fitting series number is 21642x-xx.