


BSP

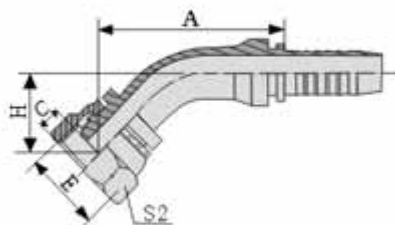

22141-45°BSP Female Swivel Sphere Seal

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

Part number	Screw Thread E	Hose bore		Dimensions			
		DN	Dash	A	C	H	S2
22141-02-04	G1/8 " x28	6	04	43.7	2	21.6	14
22141-04-03	G1/4 " x19	5	03	41.3	4	20.4	19
22141-04-05	G1/4 " x19	6	04	43.7	4	21.6	19
22141-06-05	G3/8 " x19	8	05	46.2	5	22.9	22
22141-06-06	G3/8 " x19	10	06	48.1	5	23.9	22
22141-06-08	G3/8 " x19	12	08	60.4	5	25.4	22
22141-08-08	G1/2 " x14	12	08	61.8	6	26.8	27
22141-08-10	G1/2 " x14	16	10	73	6	29	27
22141-10-10	G5/8 " x14	16	10	73.7	8	28.9	30
22141-10-12	G5/8 " x14	20	12	79.8	8	32.5	30
22141-12-10	G3/4 " x14	16	10	70.4	9.5	29.6	32
22141-12-12	G3/4 " x14	20	12	80.6	9.5	33.2	32
22141-16-12	G1 " x11	20	12	81.6	11	33.5	41
22141-16-14	G1 " x11	22	14	83.3	11	33	41
22141-16-16	G1 " x11	25	16	89.2	11	35	41

22141-20-20	G1.1/4 " x11	32	20	102.9	10	41.2	50
22141-24-24	G1.1/2 " x11	40	24	119.8	11.5	49	55
22141-32-32	G2 " x11	50	32	137.4	15	53	70