


BSP

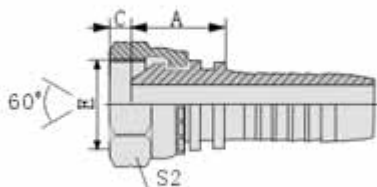

22611-BSP Female Swivel 60° Cone

Material: low or medial Carbon steel

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

| Part Number | Screw Thread E | Hose Bore | | Dimensions | | |
|-------------|----------------|-----------|------|------------|------|----|
| | | DN | Dash | A | C | S1 |
| 22611-02-03 | G1/8 " x28 | 5 | 03 | 15 | 5.5 | 14 |
| 22611-02-04 | G1/8 " x28 | 5 | 04 | 15 | 5.5 | 14 |
| 22611-04-03 | G1/4 " x19 | 5 | 03 | 17 | 5.5 | 19 |
| 22611-04-04 | G1/4 " x19 | 6 | 04 | 18 | 5.5 | 19 |
| 22611-04-05 | G1/4 " x19 | 8 | 05 | 18 | 5.5 | 19 |
| 22611-04-06 | G1/4 " x19 | 10 | 06 | 18 | 5.5 | 19 |
| 22611-06-04 | G3/8 " x19 | 6 | 04 | 19 | 6.3 | 22 |
| 22611-06-05 | G3/8 " x19 | 8 | 05 | 19 | 6.3 | 22 |
| 22611-06-06 | G3/8 " x19 | 10 | 06 | 19.5 | 6.3 | 22 |
| 22611-06-08 | G3/8 " x19 | 12 | 08 | 19.5 | 6.3 | 22 |
| 22611-08-08 | G1/2 " x14 | 12 | 08 | 21.5 | 7.5 | 27 |
| 22611-10-08 | G5/8 " x14 | 12 | 08 | 22 | 9.5 | 30 |
| 22611-10-10 | G5/8 " x14 | 16 | 10 | 23.5 | 9.5 | 30 |
| 22611-12-10 | G3/4 " x14 | 16 | 10 | 24 | 10.9 | 32 |
| 22611-12-12 | G3/4 " x14 | 20 | 12 | 24 | 10.9 | 32 |
| 22611-16-14 | G1/4 " x11 | 22 | 14 | 26 | 11.7 | 41 |

| | | | | | | |
|-------------|--------------|----|----|------|------|----|
| 22611-16-16 | G1/4 " x11 | 25 | 16 | 27 | 11.7 | 41 |
| 22611-20-20 | G1.1/4 " x11 | 32 | 20 | 30.5 | 11 | 50 |
| 22611-24-24 | G1.1/2 " x11 | 40 | 24 | 32 | 13 | 55 |
| 22611-32-32 | G2 " x11 | 50 | 32 | 31.9 | 16 | 70 |