


JIC

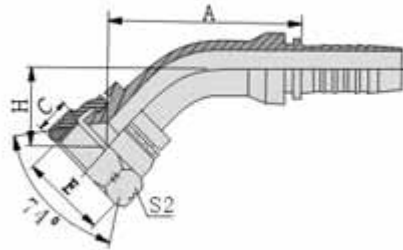

26741-45° JIC Female Swivel 74° Cone Seat SAE J514

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS			
		DN	DASH	A	C	S1	S2
26741-04-03	7/16°x20	5	03	37 . 6	9	17 . 2	15
26741-04-04	7/16°x20	6	04	40 . 2	9	18 . 1	15
26741-05-04	1/2°x20	6	04	40 . 5	9 . 5	18 . 5	17
26741-05-05	1/2°x20	8	05	42 . 7	9 . 5	19 . 3	17
26741-05-06	1/2°x20	10	06	44 . 6	9 . 5	20 . 3	17
26741-06-04	9/16°x18	6	04	40 . 5	10 . 5	18 . 5	19
26741-06-05	9/16°x18	8	05	42 . 7	10 . 5	19 . 3	19
26741-06-06	9/16°x18	10	06	44 . 3	10 . 5	20	19
26741-06-08	9/16°x18	12	08	56 . 8	10 . 5	21 . 9	19
26741-08-06	3/4°x16	10	06	45 . 7	11	21 . 4	24
26741-08-08	3/4°x16	12	08	58 . 6	11	23 . 5	24
26741-10-08	7/8°x14	12	08	58 . 9	13	24	27
26741-10-10	7/8°x14	16	10	70 . 1	13	25 . 3	27
26741-10-12	7/8°x14	20	12	77	13	28 . 9	27
26741-12-08	1 . 1/16°x12	12	08	60	15	25	32
26741-12-10	1 . 1/16°x12	16	10	71 . 2	15	26 . 4	32

26741-12-12	1 . 1/16°x12	20	12	77 . 4	15	30	32
26741-12-16	1 . 1/16°x12	25	16	85 . 3	15	31	32
26741-14-12	1 . 3/16°x12	20	12	77 . 4	15	30	36
26741-16-12	1 . 5/16°x12	20	12	77 . 4	16	30	41
26741-16-16	1 . 5/16°x12	25	16	85 . 7	16	31 . 5	41
26741-16-20	1 . 5/16°x12	32	20	96 . 3	16	35 . 5	41
<p>Note: 1. For use with braided hoses 2 . If use with spiral hoses. hose fitting series number is 26742 -xx-xx.</p>							