


DIN

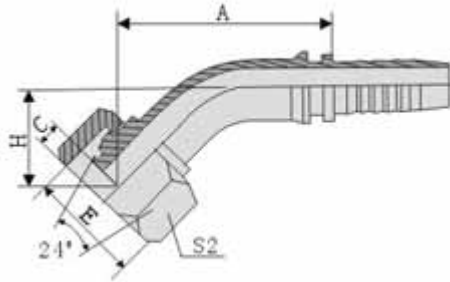

[30441-45°Metric Female Nut 24°Cone L.T. ISO 12151-2—DIN3865](#)

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data:

Part Number	Screw Thread	Hose Bore		Tube O.D.	O Ring	Dimensions			
		DN	Dash			A	C	H	S1
30441-14-04	M14×1.5	6	04	8	o06.5×1.5	4.9	2	27	19
30441-16-05	M16×1.5	8	05	10	o08.0×1.5	5.1	1.52	28.2	22
30441-16-06	M16×1.5	10	06	10	o08.0×1.5	5.3	4.2	29.2	22
30441-18-05	M18×1.5	8	05	12	o10.0×1.5	4.6	2.2	52.2	9.22
30441-18-06	M18×1.5	10	06	12	o10.0×1.5	4.2	2.5	29.2	2.24
30441-22-05	M22×1.5	8	05	15	o12.0×2.0	4.8	3.2	5.25	27
30441-22-06	M22×1.5	10	06	15	o12.0×2.0	5.0	4.2	5.25	7.27
30441-22-08	M22×1.5	12	08	15	o12.0×2.0	6.8	1.2	5.33	2.27
30441-26-08	M26×1.5	12	08	18	o15.0×2.0	6.2	2.5	26.1	3.2
30441-26-10	M26×1.5	16	10	18	o15.0×2.0	8.0	7.2	5.35	9.32
30441-26-12	M26×1.5	20	12	18	o15.0×2.0	8.6	9.2	5.39	5.32
30441-27-10	M27×1.5	16	10	18	o15.0×2.0	7.2	2.5	27.7	3.2
30441-27-12	M27×1.5	20	12	18	o15.0×2.0	8.6	9.2	5.39	5.32
30441-30-10	M30×2	16	10	22	o20.0×2.0	7.5	1.4	30.3	3.36
30441-30-12	M30×2	20	12	22	o20.0×2.0	8.9	1.4	41.7	3.6

30441-36-12M36x2	20	12	28	o26.0x2.082	4	33.941
30441-36-14M36x2	22	14	28	o26.0x2.083.74		33.341
30441-45-20M45x2	32	20	35	o32.0x2.599.65		40.855
30441-52-20M52x2	32	20	42	o38.0x2.5103	5.541.960	
30441-52-24M52x2	40	24	42	o38.0x2.5117	5.545.860	