


DIN

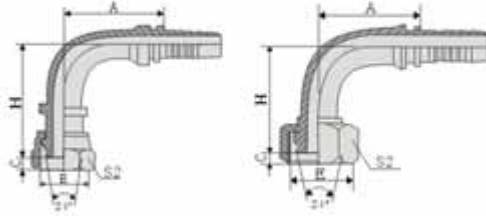

2/30491 90°Metric Female Nut 24°Cone O-ring L.T. ISO 12151-2—DIN3865

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data:

Part Number	Screw Thread E	Hose Bore		Tube O.D.	O Ring	Dimensions			
		DN	Dash			A	C	H	S1
20491-12-03	M12×1.5	5	03	6	o04.5×1.5	26.5	1	41.5	17
20491-12-04	M12×1.5	6	04	6	o04.5×1.5	30	1	44.5	17
30491-14-04	M14×1.5	6	04	8	o06.5×1.5	30	2	46	19
30491-16-04	M16×1.5	6	04	10	o08.0×1.5	30	2	46.5	22
30491-16-05	M16×1.5	8	05	10	o08.0×1.5	33	2	49.5	22
30491-16-06	M16×1.5	10	06	10	o08.0×1.5	35.3	2	51.8	22
30491-18-05	M18×1.5	8	05	12	o10.0×1.5	33	2.5	42	22
30491-18-06	M18×1.5	10	06	12	o10.0×1.5	35.3	2.5	53.3	24
30491-22-06	M22×1.5	10	06	15	o12.0×2.0	35.3	2.5	47.3	27
30491-22-08	M22×1.5	12	08	15	o12.0×2.0	41	2.5	61	27
30491-26-08	M26×1.5	12	08	18	o15.0×2.0	42	2.5	51	32
30491-26-10	M26×1.5	16	10	18	o15.0×2.0	56.5	2.5	67.5	32
30491-26-12	M26×1.5	20	12	18	o15.0×2.0	65.5	2.5	77	32
30491-27-10	M27×1.5	16	10	18	o15.0×2.0	56.5	2.5	67.5	32

30491-27-12	M27×1.5	20	12	18	o15.0×2.0	65.5	2.5	77	32
30491-30-10	M30×2	16	10	22	o20.0×2.0	56.5	4	57.2	36
30491-30-12	M30×2	20	12	22	o20.0×2.0	65.5	4	80	36
30491-36-12	M36×2	20	12	28	o26.0×2.0	65.5	4	69	41
30491-36-14	M36×2	22	14	28	o26.0×2.0	71.2	4	70	41
30491-45-16	M45×2	25	16	35	o32.0×2.5	76.7	5	75	55
30491-45-20	M45×2	32	20	35	o32.0×2.5	91.5	5	88.5	55
30491-52-20	M52×2	32	20	42	o38.0×2.5	93	5.5	87	60
30491-52-24	M52×2	40	24	42	o38.0×2.5	109.4	5.5	104	60