


DIN

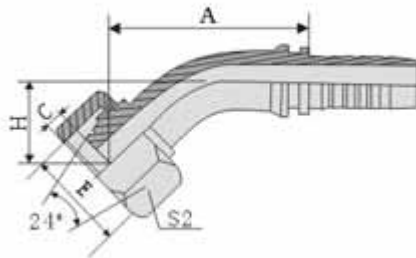

[30541-45° Metric Female Nut 24° Cone O-Ring H.T. ISO 12151-2—DIN3865](#)

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data:

Part Number	Screw Thread E	Hose Bore		Tube O.D.	O Ring	Dimensions		
		DN	Dash			A	C	S2
30511-14-04	M14x1.5	6	04	6	o04.5x1.5	28.5	1.1	19
30511-16-04	M16x1.5	6	04	8	o06.5x1.5	29	1.5	22
30511-16-05	M16x1.5	8	05	8	o06.5x1.5	29	1.5	22
30511-18-04	M18x1.5	6	04	10	o08.0x1.5	29.5	2	22
30511-18-06	M18x1.5	10	06	10	o08.0x1.5	29	2	24
30511-20-06	M20x1.5	10	06	12	o10.0x1.5	28.5	2.5	24
30511-20-08	M20x1.5	12	08	12	o10.0x1.5	31.5	2.5	27
30511-22-06	M22x1.5	10	06	14	o11.0x2.0	28.5	2.5	27
30511-22-08	M22x1.5	12	08	14	o11.0x2.0	31.5	2.5	27
30511-24-06	M24x1.5	10	06	16	o13.0x2.0	28.5	2.5	30
30511-24-08	M24x1.5	12	08	16	o13.0x2.0	30	3	30
30511-30-10	M30x2	16	10	20	o16.3x2.4	36	3	36
30511-30-12	M30x2	20	12	20	o16.3x2.4	39	3	36
30511-36-12	M36x2	20	12	25	o20.0x2.4	36	3	41

30511-36-14	M36x2	22	14	25	o20.0x2.4	36	3	41
30511-42-12	M42x2	20	12	30	o25.3x2.4	40	5	50
30511-42-16	M42x2	25	16	30	o25.3x2.4	41	5	50
30511-52-20	M52x2	32	20	38	o33.3x2.4	44	6.5	60
30511-52-24	M52x2	40	24	38	o33.3x2.4	44	6.5	60