


JIC

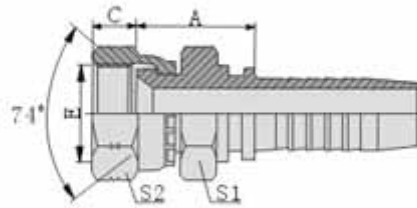

26711D-JIC Female Swivel 74° Cone Seat Double Hexagon SAE J514

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

PART NUMBER	SCREW THREAD E	HOSE BORE		DIMENSIONS			
		DN	DASH	A	C	S1	S2
26711D-04-04	7/16°x20	6	04	20	9	15	15
26711D-05-04	1/2°x20	6	04	20 . 5	9 . 5	17	17
26711D-06-04	9/16°x18	6	04	21	10 . 5	19	19
26711D-06-06	9/16°x18	10	06	21	10 . 5	19	19
26711D-08-06	3/4°x16	10	06	25	11	24	24
26711D-08-08	3/4°x16	12	08	24 . 5	11	24	24
26711D-08-10	3/4°x16	16	10	25 . 4	11	24	24
26711D-10-08	7/8°x14	12	08	28	13	27	27
26711D-10-10	7/8°x14	16	10	29	13	27	27
26711D-12-12	1 . 1/16°x12	20	12	31 . 5	15	32	32
26711D-16-12	1 . 5/16°x12	20	12	33 . 5	16	41	41
26711D-16-16	1 . 5/16°x12	25	16	34 . 5	16	41	41
26711D-16-20	1 . 5/16°x12	32	20	36 . 5	16	41	41
26711D-20-20	1 . 7/16°x14	32	20	39	17	50	50

Note: 1. For use with braided hoses 2 . If use with spiral hoses. hose fitting series number is 26712D -xx-xx.