


DIN

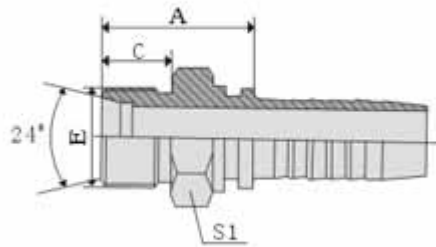

[10411---Metric Male 24° Cone Seat L.T ISO 8434-1—DIN3861](#)

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

Technical Data

Part Number	Screw Thread E	Hose Bore		TUBE O.D.	Dimensions		
		DN	DASH		A	C	S1
10411-12-04	M12×1.5	5	04	6	20.5	10	12
10411-14-04	M14×1.5	6	04	8	20.5	10	14
10411-14-05	M14×1.5	8	05	8	21.5	10	14
10411-16-04	M16×1.5	6	04	10	22.5	11	17
10411-16-05	M16×1.5	8	05	10	22.5	11	17
10411-16-06	M16×1.5	10	06	10	22.5	11	17
10411-18-05	M18×1.5	8	05	12	23.5	11	19
10411-18-06	M18×1.5	10	06	12	21.5	11	19
10411-22-06	M22×1.5	10	06	15	24.5	12	24
10411-22-08	M22×1.5	12	08	15	26	12	24
10411-26-08	M26×1.5	12	08	18	26.5	12	27
10411-26-10	M26×1.5	16	10	18	27	12	27
10411-27-10	M27×1.5	16	10	18	32	14	30
10411-30-10	M30×1.5	16	10	22	29	14	32
10411-30-12	M30×1.5	20	12	22	29	14	32
10411-36-16	M36×1.5	25	16	28	31.5	14	38

10411-45-20	M45×1.5	32	20	35	36	16	46
10411-52-24	M52×1.5	40	24	42	38	16	55