


# DIN

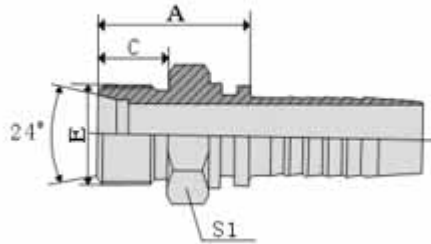

## 10511--Metric Male 24° Cone Seat H.T ISO 8434-1—DIN3861

Material: low or medial Carbon steel.

Surface treatment: trivalent or hexavalent chromium passivating Zinc (CR3+ or CR6+).

Inner packing: Plastic bag.

Outer packing: Standard exporting carton, seaworthy pallet.

Lutong is specialized in supply of hydraulic hose fittings with good quality and favorable price.

### Technical Data

Part Number	Screw Thread E	Hose Bore		TUBE O.D.	Dimensions		
		DN	DASH		A	C	S2
10511-14-04	M14×1.5	6	04	6	24.1	12	14
10511-16-04	M16×1.5	6	04	8	26.5	12	17
10511-18-04	M18×1.5	6	04	10	26.5	12	19
10511-20-05	M20×1.5	8	05	12	27	12	22
10511-20-06	M20×1.5	10	06	12	26.5	12	22
10511-22-05	M22×1.5	8	05	14	30.5	14	24
10511-22-06	M22×1.5	10	06	14	30.5	14	24
10511-22-08	M22×1.5	12	08	14	31	14	24
10511-24-08	M24×1.5	12	08	16	31.5	14	27
10511-30-10	M30×2	16	10	20	36	16	32
10511-30-12	M30×2	20	12	20	36	16	32
10511-36-12	M36×2	20	12	25	40.5	18	41
10511-36-16	M36×2	25	16	25	41.5	18	38
10511-42-16	M42×2	25	16	30	44	20	46

10511-42-20	M42×2	32	20	30	45	20	46
10511-52-20	M52×2	32	20	38	50	22	55